

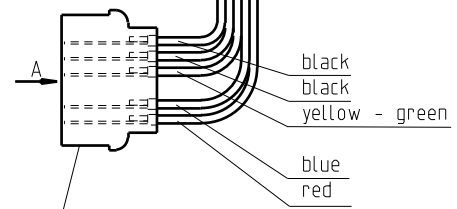


NAPETOST	230 V
VOLTAGE	230 V
FREKVENCA	50 Hz
FREQUENCY	50 Hz
NAZIVNA MOČ	450 W
NOMINAL POWER	450 W

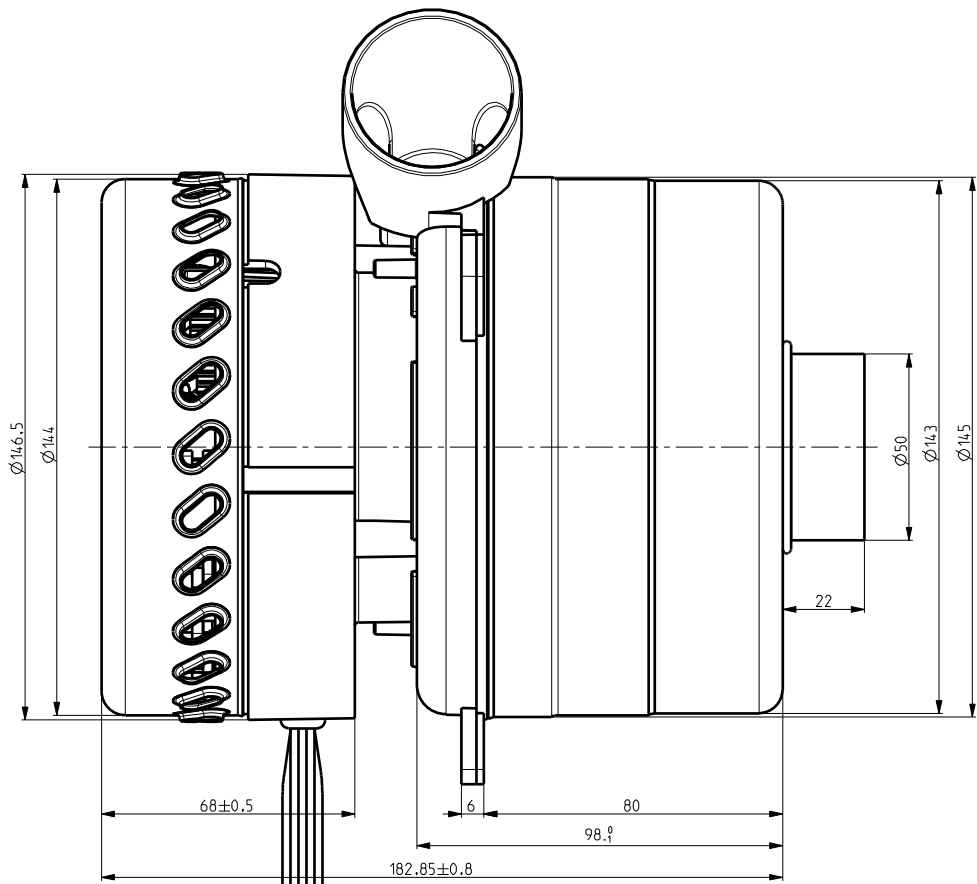

Opomba:
Za kupca KBA Mödling dobaviti brez konektorja!
Remark:
For KBA Mödling manufactured without connector!

CONNECTOR AMP 927742-6		
PIN	COLOR	
6	black	AC INPUT 230V±10%
5	black	AC INPUT 230V±10%
4	ye-gr	PROTECTIVE EARTH
3		
2	blue	Low isolated speed
1	red	High Control 0-10V DC

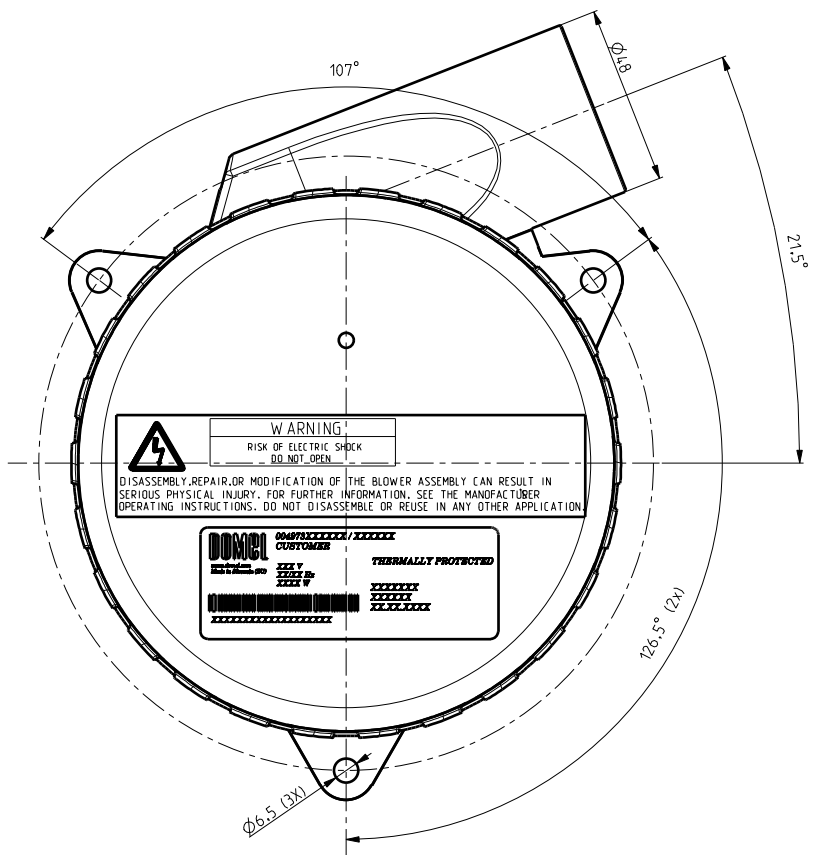

WARNING
RISK OF ELECTRIC SHOCK
DO NOT OPEN

DISASSEMBLY, REPAIR, OR MODIFICATION OF THE BLOWER ASSEMBLY CAN RESULT IN SERIOUS PHYSICAL INJURY. FOR FURTHER INFORMATION, SEE THE MANUFACTURER OPERATING INSTRUCTIONS. DO NOT DISASSEMBLE OR REUSE IN ANY OTHER APPLICATION.

DOMEL 004073XXXX / XXXX
CUSTOMER
THERMALLY PROTECTED

Risba velja za puhalo z id. 210271.

OSNOVNE ZNAČILNOSTI		TYPICAL CHARACTERISTICS	
IZVEDBA	TROSTOPENJSKA	FAN SYSTEM	THREE STAGE
VLEŽAJENJE	DVA KROGLIČNA LEŽAJA	BEARINGS	DUAL BALL
VRSTA PRETOKA	MIMO MOTORJA	DISCHARGE	BY PASS
SMER VRTENJA	LEVA	DIRECTION OF ROTATION	CCW

Tolerance obojin mer Tolerances without individual indications		Površinska rešavevid Surface Finishing		Merilo Scale	3:10	Original format ISO 5457 - A2
ISO 2768 - m				Gradivo / Material		
Datum/Date		Ime/Name		Naziv Title		
Zdelal Designed		16.09.04		Kavcic M.		
Prejeli Verified		06.07.09		J. Riharsic		
D1	9045	06.07.09	B. Pajk			
C1	8746	03.10.08	Koblar U.			
B1	7925	11.11.06	Koblar D.			
AD	7076	30.09.04	Kavcic M.			
Dzi. Mark		St. obvestila No. of notice		Datum Date		Ime Name
				01.01.21. 4228		Telezelniki, Slovenija
				Koda Code	497.3.265-446	
				List Sheet	3+	
				Stran Page	1	
				4973265446_SESALNA_ENOTA_A2		

Izdajane s CAD-Pro/Engineer - notno spreminjanje ni dovoljeno! Vsak prenos, nalaganje, razpis ali uporaba v nedovoljeni nameni ni dovoljena na tiskani ali elektronski kopiji. Izdajane s CAD-Pro/Engineer - change is not allowed. Any unauthorized copying of this drawing or unauthorised distribution of the information contained herein is prohibited.